

FIG. 1

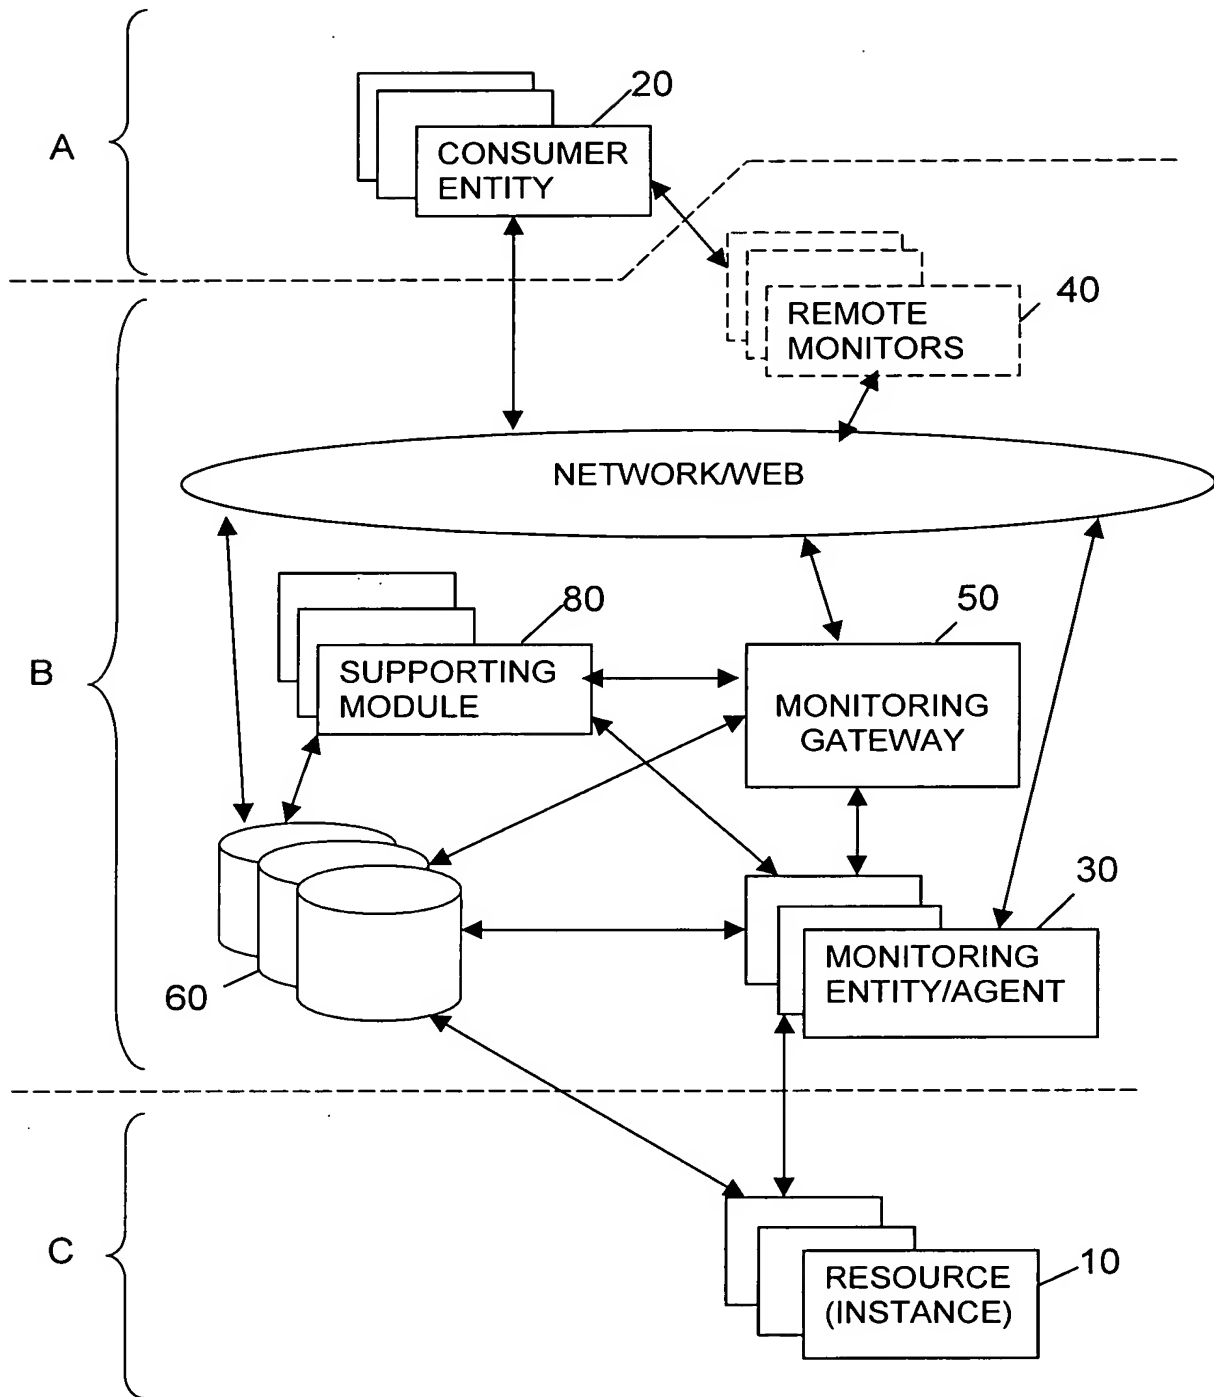


FIG. 2

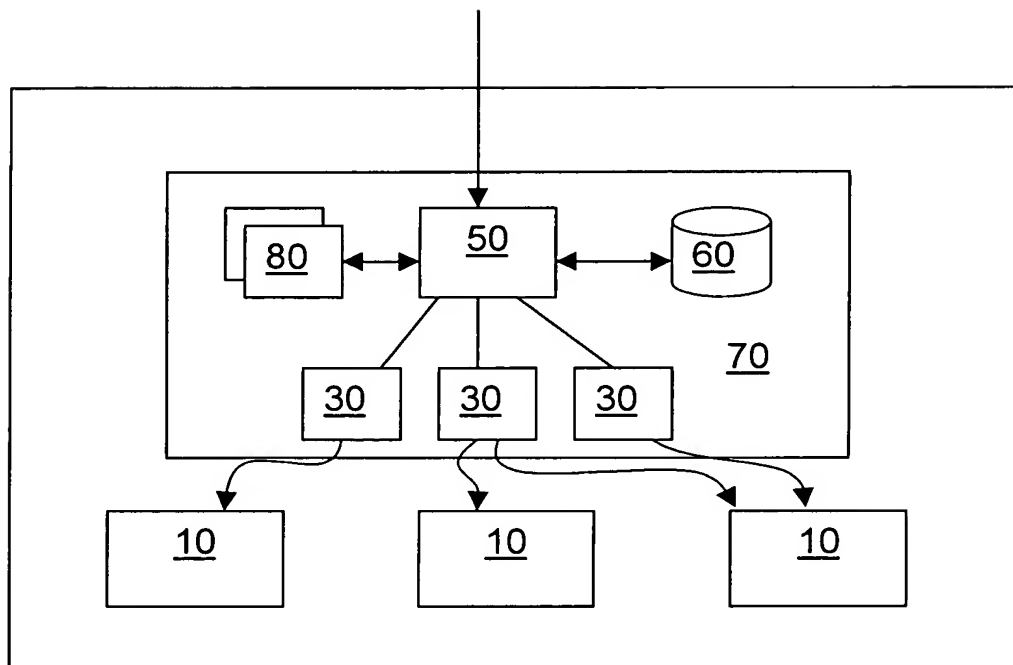


FIG.3

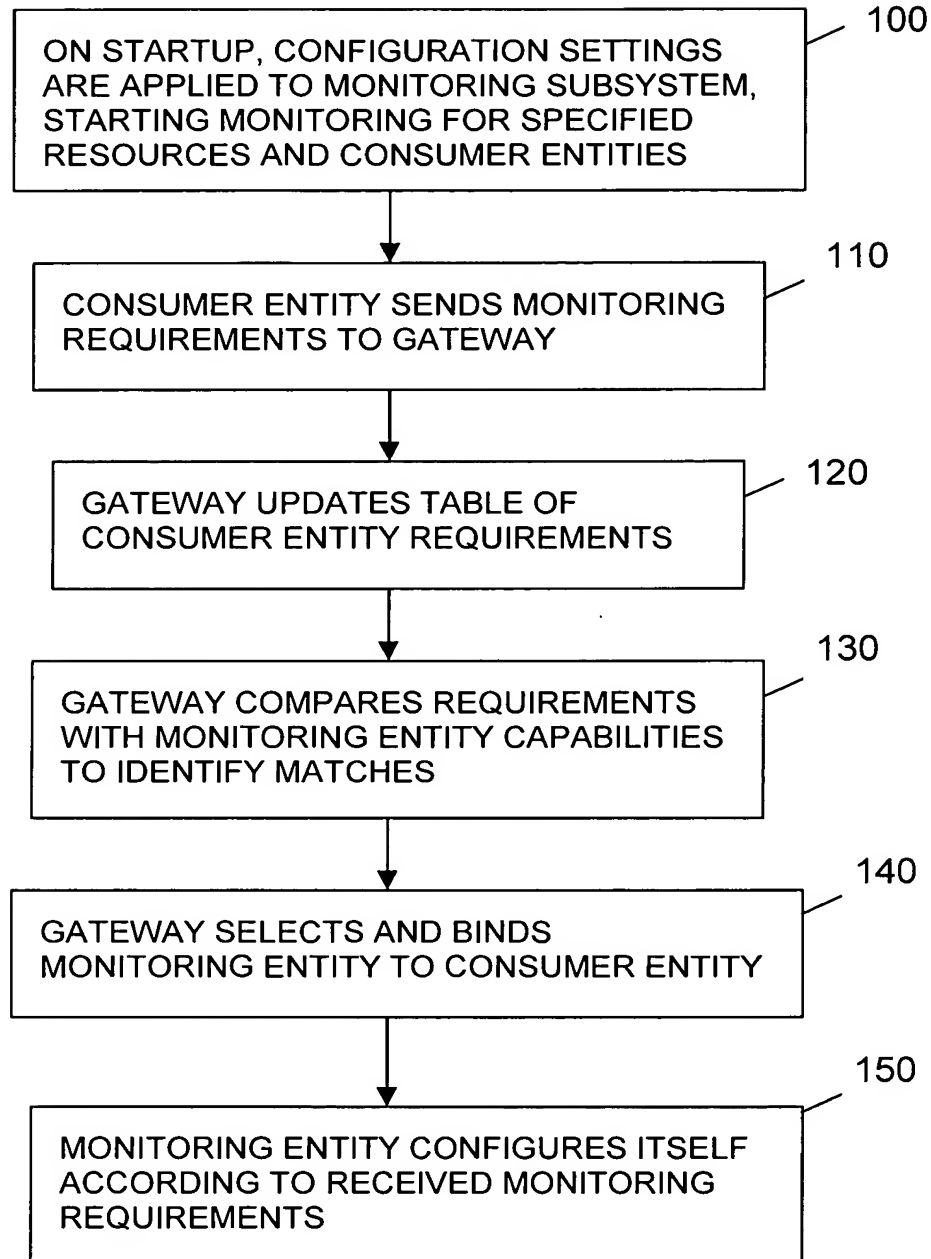


FIG. 4

```
<Service Name="StockQuote">
  <MeasurementMode> Internal </ MeasurementMode>
  <Metrics>
    <Metric Name="cpuUtilization">
      <Measurement>
        <granularity> per-request </granularity>
        <Communication>Pull</Communication>
        <Address> com.ibm.StockQuote.getCpu() </Address>
      </Measurement>
      <format>
        <type>float</type>
        <RelativeTo>100</RelativeTo>
        <Duration unit="msec"> 10 </Duration>
        <Decimal>2</Decimal>
        <Delimiter>::</Delimiter>
      </format>
    </Metric>
    <Metric Name="memory-usage">
      <Measurement>
        <granularity> per-request </granularity>
        <Communication>Push</Communication>
        <Address>
          socket-based-on-configuration
        </Address>
      </Measurement>
      <format>
        <type>Bytes</type>
        <Delimiter> :: </Delimiter>
      </format>
    </Metric>
  </Metrics>
</Service>
```